

SPECIFICATIONS

LCP8 - Conductive plastic element

www.precisionsales.com

610-359-1002 eparts@precisionsales.com

ELECTRICAL

RESISTANCE RANGE (OHMS)-----	1K,2K,5K,10K,20K,50K
RESISTANCE TOLERANCE -----	±15%
LINEARITY,INDEPENDENT -----	±2.0%
RESOLUTION -----	ESSENTIALLY INFINITE
ELECTRICAL STROKE -----	.433±.020
OUTPUT SMOOTHNESS -----	0.1% AGAINST INPUT VOLTAGE
POWER RATING -----	0.2WATT
INSULATION RESISTANCE -----	1000 MEGOHMS @ 500 VDC
DIELECTRIC STRENGTH -----	500 VAC MIN.
FRICITION -----	30 GRAMS

MECHANICAL

MECHANICAL STROKE -----	.472
STOP STRENGTH -----	APPROX. 2 POUNDS
LIFE EXPECTANCY -----	20,000,000 STROKES
WEIGHT APPROX. -----	0.2 OZS.
MARKINGS -----	ETI SYSTEMS P/N LCP8-10 RESISTANCE
SPRING RETURN -----	RETRACTED, APPROX. 230GRAMS
FORCE WHEN APPLICABLE -----	EXTENDED, APPROX. 57GRAMS



ENVIRONMENTAL

SHOCK -----	50G, 11ms
VIBRATION -----	10Hz TO 2000Hz 15G
OPERATING TEMPERATURE RANGE -----	-30° C TO +105° C
TEMPERATURE COEFFICIENT -----	±400 PPM /°C

OPTIONS

RESISTANCE TOLERANCE -----	±10%
LINEARITY,PRECISION -----	±1% GREEN 3
SPECIAL MACHINED SHAFT -----	1 YELLOW

SCHEMATIC

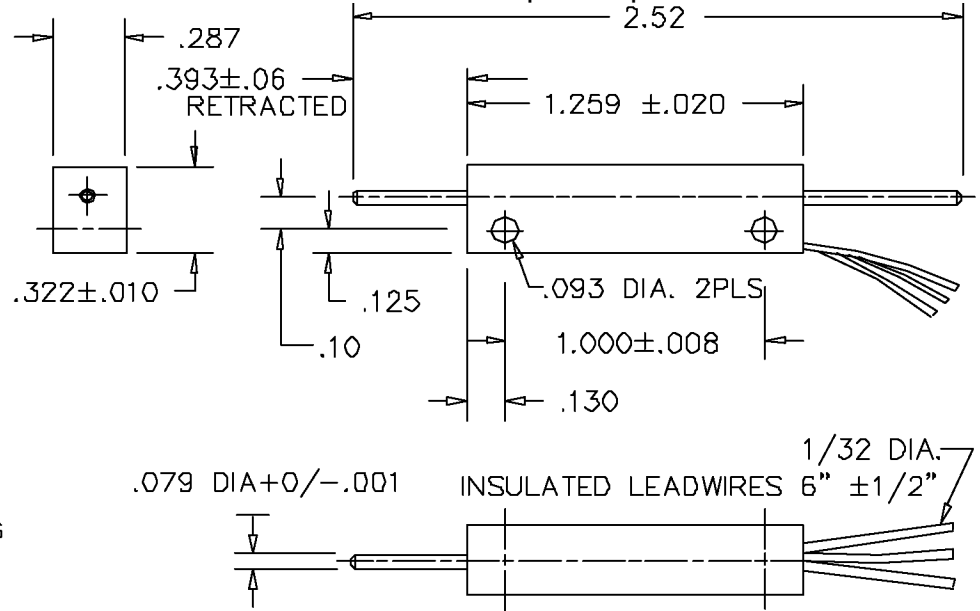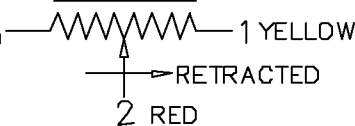

MODEL NO'S.

SHAFT STYLES

LCP8P-10	(P)		PLAIN
LCP8T-10	(T)		THREADED 2-56 UNC-2A
LCP8C-10	(C)		CHAMFERED
LCP8S-10	(S)		SPRING RETURN (INTERNAL)