



143-P92

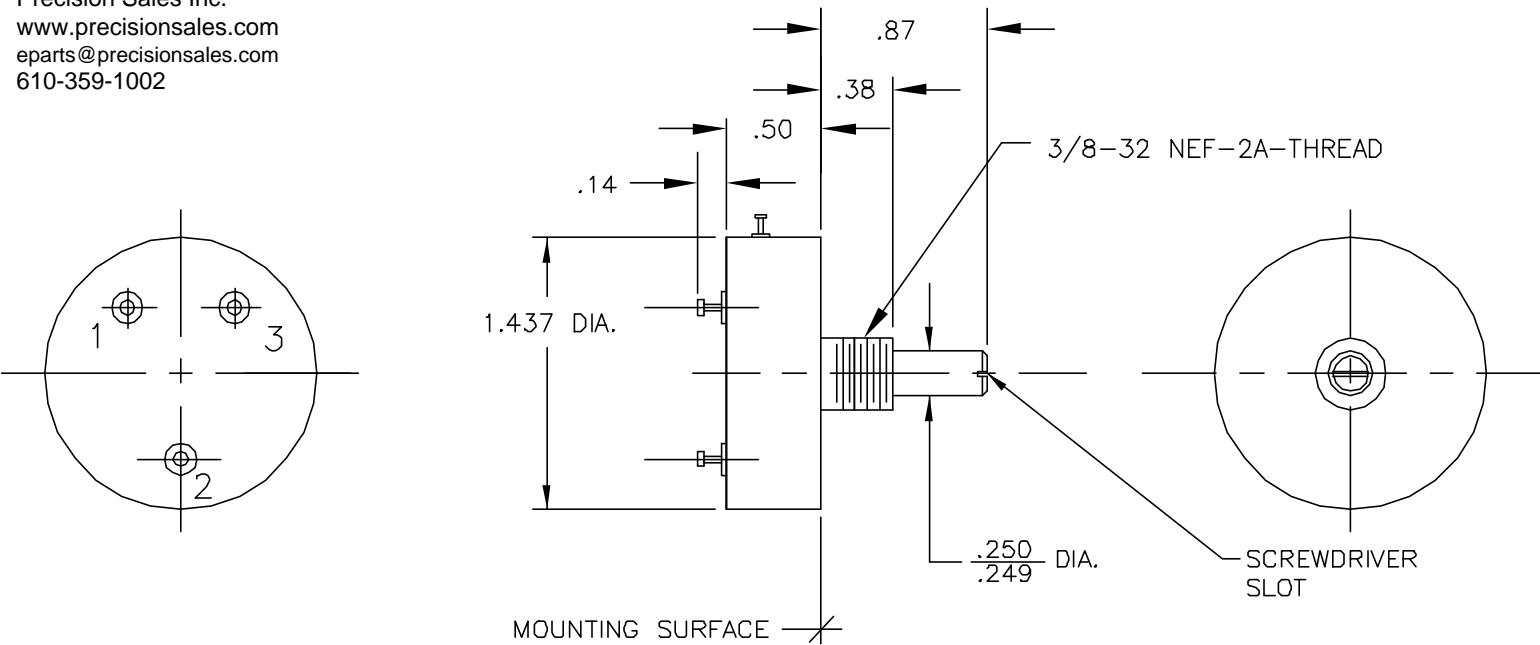

DASH No.	RESIST. (ohms)
102	1,000
202	2,000
252	2,500
502	5,000
103	10,000
203	20,000
503	50,000
104	100,000



10. DIELECTRIC STRENGTH: 750 VOLTS AC.
9. POWER RATING: 3 WATTS AT 40°C.
8. OPERATING TEMPERATURE RANGE: -55° TO +105°C.
7. TEMPERATURE COEFFICIENT OF RESISTANCE: 500 PPM/°C.
6. TOTAL MECHANICAL ANGLE: 360°.
5. THEORETICAL ELECTRICAL TRAVEL: 340° ±5°.
4. INDEPENDENT LINEARITY: ±1.0%.
3. THEORETICAL RESOLUTION: INFINITE.
2. TOTAL RESISTANCE TOLERANCE: ±20%.
1. TOTAL RESISTANCE: SEE CHART (OTHER VALUES ON REQUEST).

15. GOLD PLATED TERMINALS.
14. STAINLESS STEEL SHAFT.
13. RUNNING TORQUE: 1.0 OUNCE-INCH, NOMINAL.
12. LIFE: 20,000,000 REV. AT 40 RPM.
11. OUTPUT SMOOTHNESS: 1%.